MX40-SC



MX40-SS



MY40-SC

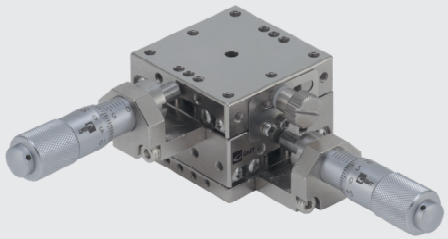

MY40-SS



Specification

Unit: mm

Model no.	Table size	Axis	Feed position	Travel stroke	Micrometer minimum reading	Straightness accuracy	Allowable Loading (kgf)	Weight (kg)	Material	Surface finish
MX40-SC	40*40	X-axis	Central	±6.5	10μm	3μm	10	0.23	SUS 440C	Electroless nickel plating
MX40-SS			Side							
MY40-SC		XY-axis	Central				9.7	0.46		
MY40-SS			Side							

MX40-SC

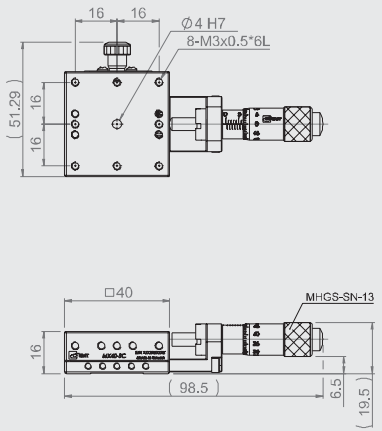

MX40-SS

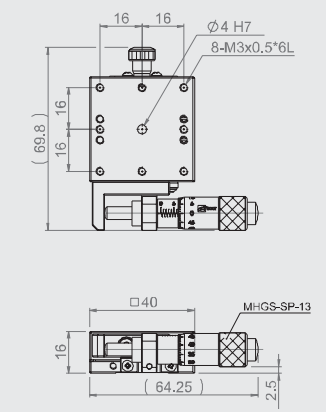



MX(Y)40-S
Mounting dimensions

MY40-SC

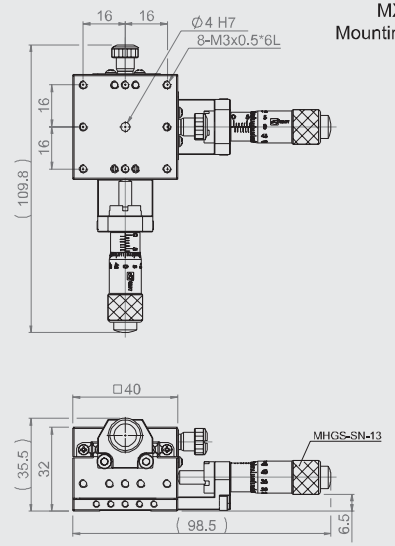
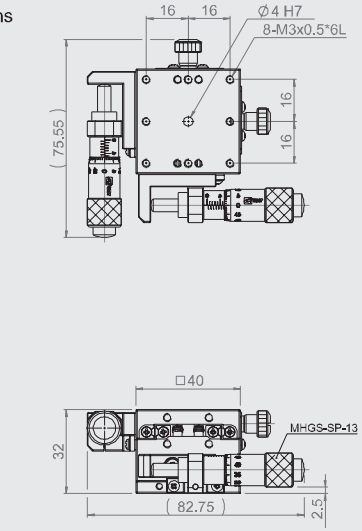
MY40-SS