MX50-SC-28



MX50-SS-28



MY50-SC-28

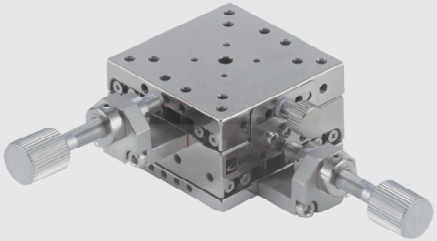

MY50-SS-28



Specification

Unit: mm

Model no.	Table size	Axis	Feed position	Travel stroke	Movement per knob rotation	Straightness accuracy	Allowable Loading (kgf)	Weight (kg)	Material	Surface finish
MX50-SC-28	50*50	X-axis	Central	±6.5	0.5mm	3μm	15	0.28	SUS 440C	Electroless nickel plating
MX50-SS-28			Side							
MY50-SC-28		XY-axis	Central				14.7	0.56		
MY50-SS-28			Side							

MX50-SC-28

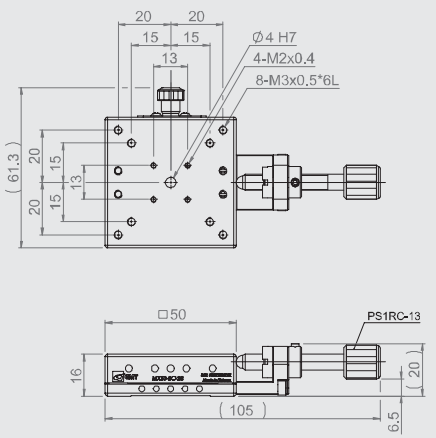

MX50-SS-28

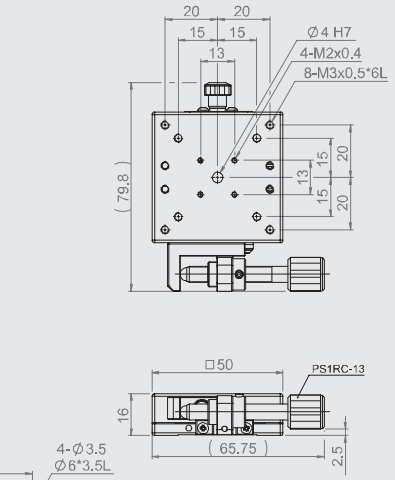



MX(Y)50-S-28
Mounting dimensions

MY50-SC-28

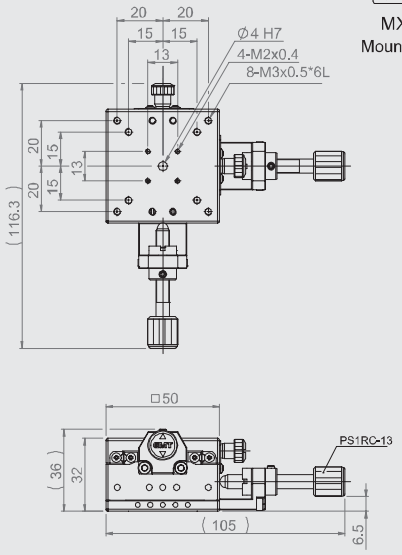
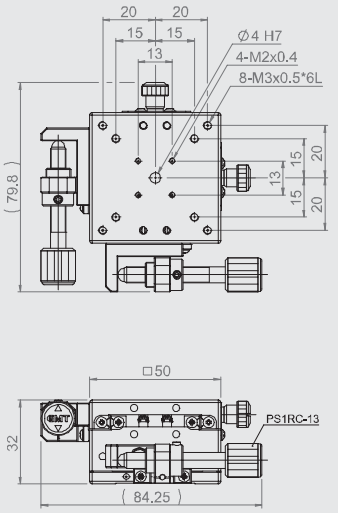
MY50-SS-28